Blusid





Ultralight & Superstrong !

40% LIGHTER

than traditional rubber air hoses

100% RUBBER

- Male NPT connections
- Extreme weather flexibility
- Lightweight, coils easily
- Abrasion resistant
- Ozone resistant
- Kink resistant core design
- 300 PSI working pressure
- 4:1 Safety factor

Solid Brass fittings superior than aircraft aluminium

4-Finger grip | bend restrictor

> High-strength polyester woven braided reinforcement



Flexibility under extreme conditions from -50°F to +190°F

Kink resistant

Available Hose I.D. (in.): 3/4 Available Hose Length (ft.): 15



Heavy-duty wrapped finish



www.blubirdindustries.com | sales@blubirdindustries.com | tel:+1.844.769.4673 30 N Gould St, Ste 4025 Sheridan, WY 82801





Ultralight & Superstrong !



Rubber Air Hoses




40% Lighter Than Traditional **Rubber Air Hoses** 100% Rubber

- Solid brass fittings that are superior to aircraft aluminium
- High-strength polyester woven braided reinforcement
- Flexibility from -50°F to +190°F
- Ozone resistant | Abrasion resistant | Kink resistant
- 4-Finger grip bend restrictor for better use & easier control over the hose

Wrapped Finish

This ultra-light and super strong rubber air hose is 40% lighter than other rubber hoses, as light as PVC or hybrid air hoses. This BluBird rubber air hose lays flat and does not kink under pressure and is easier to clean and wrap neatly. Heavy-duty wrapped finish provides protection to prevent damage and wear in different applications and environments ensuring durability and longevity. Constructed with abrasion-resistant exterior cover and polyester braided reinforcement from the inside.

	Į*	Flexibility in extreme conditions from -50°F to +190°F		• Safety factor		
Model#	SKU#	Description	I.D	Length	Fitting	
BBPRO3415-2pk	10015607	BluBird Pro Rubber Air Hose Assembly 3/4" X 15'- 3/4" Male-NPT, 300 PSI, EPDM, 2 Pack	3/4"	15′	3/4" Male NPT	

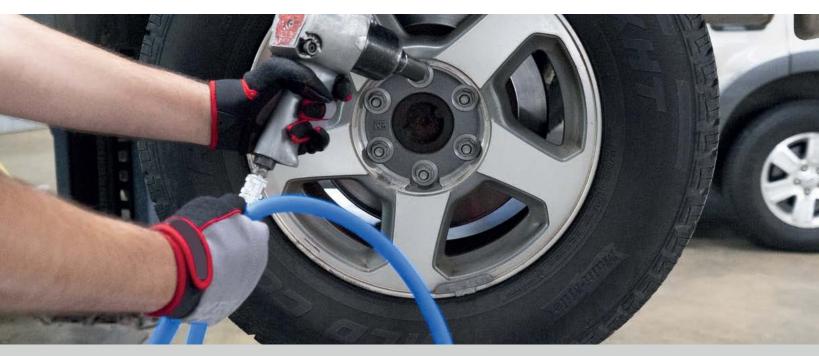



www.blubirdindustries.com | sales@blubirdindustries.com | tel: +1.844.769.4673 30 N Gould St, Ste 4025 Sheridan, WY 82801

