




1 Year
Limited
Warranty

Pressure Washer Inlet Hose

40% LIGHTER
than traditional rubber
water hose

- 3/4" GHT plated brass fittings
- 500 PSI minimum burst pressure
- Maintains integrity under extreme weather conditions
- Abrasion resistant
- Kink resistant
- All weather flexibility
- Handles hot water up to 212°F

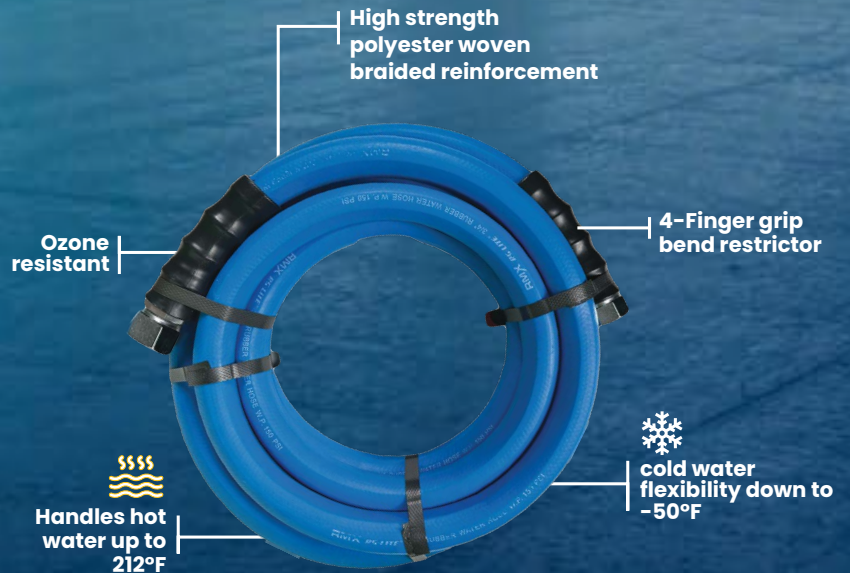

Available
Hose I.D. (in.): 3/4

Available
Hose Length (ft.): 15, 25



Visit Website



www.blubirdindustries.com | sales@blubirdindustries.com | tel:+1.844.769.4673
30 N Gould St, Ste 4025 Sheridan, WY 82801



Better Water Flow Helps To Prevent Cavitation In The Engine

Pressure Washer Inlet Hose



40% Lighter Than Traditional Rubber Water Hose

- 100% Rubber construction
- 3/4" GHT plated brass fittings
- High strength polyester woven braided reinforcement
- 500 PSI minimum burst pressure
- Handles hot water up to 212°F
- Maintains integrity under extreme weather conditions
- Flexibility from -50° F to +190° F
- Ozone resistant | Abrasion resistant | Kink resistant
- 4-Finger grip bend restrictor for better use & easier control over the hose



The BluShield In-let Hose is the perfect addition to your pressure washer set-up. Your pressure washer needs water in and the larger the diameter of your inlet hose the greater water flow is into your pressure washer. This means less interruption of the flow of water and allows your pressure washer to operate more efficiently. The BluShield In-let Hose is 100% rubber and is the lightest, strongest, most flexible rubber water hose available anywhere.

Water Hose Flow

Hose I.D.	GPM @ 65 PSI	GPM @ 35 PSI
3/4"	17.10	10.90



Flexibility in extreme conditions from -50°F to +190°F

500 PSI min. burst pressure

Handles hot water up to 212°F

4:1 Safety factor

Model#	SKU#	Description	I.D	Length	Fitting
BS3415-IH	10012663	BluSeal Pressure Washer Inlet Hose size 3/4" x 15'	3/4"	15'	3/4" GHT Coupling
BS3425-IH	10010604	BluSeal Pressure Washer Inlet Hose size 3/4" x 25'	3/4"	25'	3/4" GHT Coupling