





## 18 GAUGE HEAVY-DUTY AIR HOSE REEL

- Auto-retractable hose reel
- 12 point ratchet system which helps lock out the hose at shorter lengths
- Heavy-duty spring vibration resistant
  mechanism
- Professional grade steel construction with brass fittings
- Corrosion resistant solid brass fittings
- Cold weather flexibility from -40°F to +190°F
- Ceiling, wall, floor, rigs & trailer mountable

## **Mounting Options**



Available Hose I.D. (in.): 3/8, 1/2

Trucks & Trailers

Available Hose Length (ft.): 25, 50



www.blubirdindustries.com | sales@blubirdindustries.com | tel:+1.844.769.4673 30 N Gould St, Ste 4025 Sheridan, WY 82801





Four rollers reduce hose wear



Comes with Rubber Stopper



12 point ratchet gearing system








## **18 GAUGE HEAVY-DUTY AIR HOSE REELS**

**Dino-Hide** air hose reel is an ultimate combination of corrosion resistant powder coated steel, single adjustable guide arm, L-Shaped base with groove reinforcement ensuring a stable support along with wrapped Air hose that is abrasion resistant. This Hose Reel utilizes a fully enclosed multi-position 12-point ratchet spring system to lock hose at designed shorter and longer length. Brass swivel joints hose inlet connection protecting against leaks while reel stopper and 4 non snag rollers reduce hose abrasion. This hose reel can be mounted on floor, wall, ceiling etc, perfect for automotive and DIY users. Dino-Hide Air hose reel is equipped with polyester braided wrapped finish air hose that is extreme abrasion and ozone resistant. The oil resistant core tuber and cover resist grease, oil and diesel. The hose offer exceptional cold weather flexibility from -40°F to +190°F.

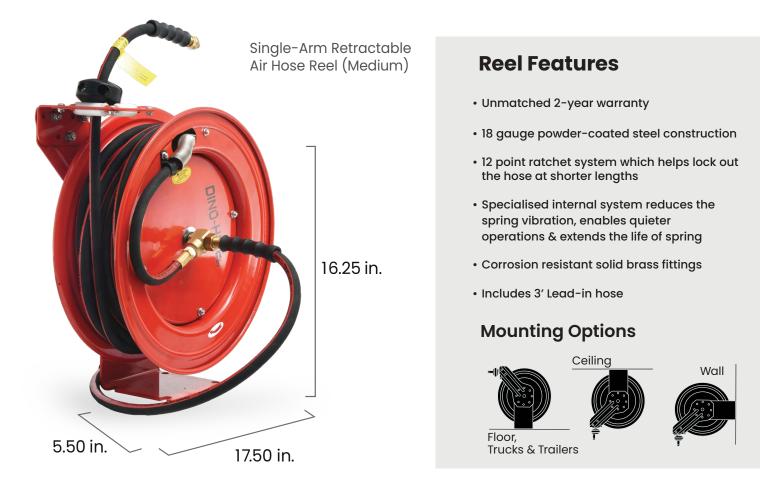

Model#	SKU#	Description	I.D	Length	Fitting
WLEPROR3825	10011702	Dino-Hide Rubber Air Hose Reel Heavy-Duty Single-Arm 3/8" x 25'	3/8″	25′	3/8" Male NPT
WLEPROR3850	10011703	Dino-Hide Rubber Air Hose Reel Heavy-Duty Single-Arm 3/8" x 50'	3/8″	50′	3/8" Male NPT
WLERHD1250	10011707	Dino-Hide Rubber Air Hose Reel Heavy-Duty Single-Arm 1/2" x 50'	1/2″	50′	Outlet - 1/2" M-NPT & Reel Inlet 1/2" M-NPT + 3/8" Reducer



